STEP #1

MOUNT THE STAND-ALONE TIMER NEXT TO POWERCENTER YOU WISH TO CONTROL,
PLUG POWERCENTER INTO OUTLET ON BOTTOM OF TIMER
PLUG TIMER POWERCORD INTO AVAILABLE OUTLET

STEP #2

SET THE TIMER

STEP #3

MAKE SURE THE BLACK LEFT-TO-RIGHT POSITION SWITCH ON POWERCENTER IS IN LOW, MED, OR HI POSITION
***SILVER TOGGLE SWITCH DOES NOT FUNCTION IN THIS SCENARIO, POSITION DOES NOT MATTER**

***NOTE**
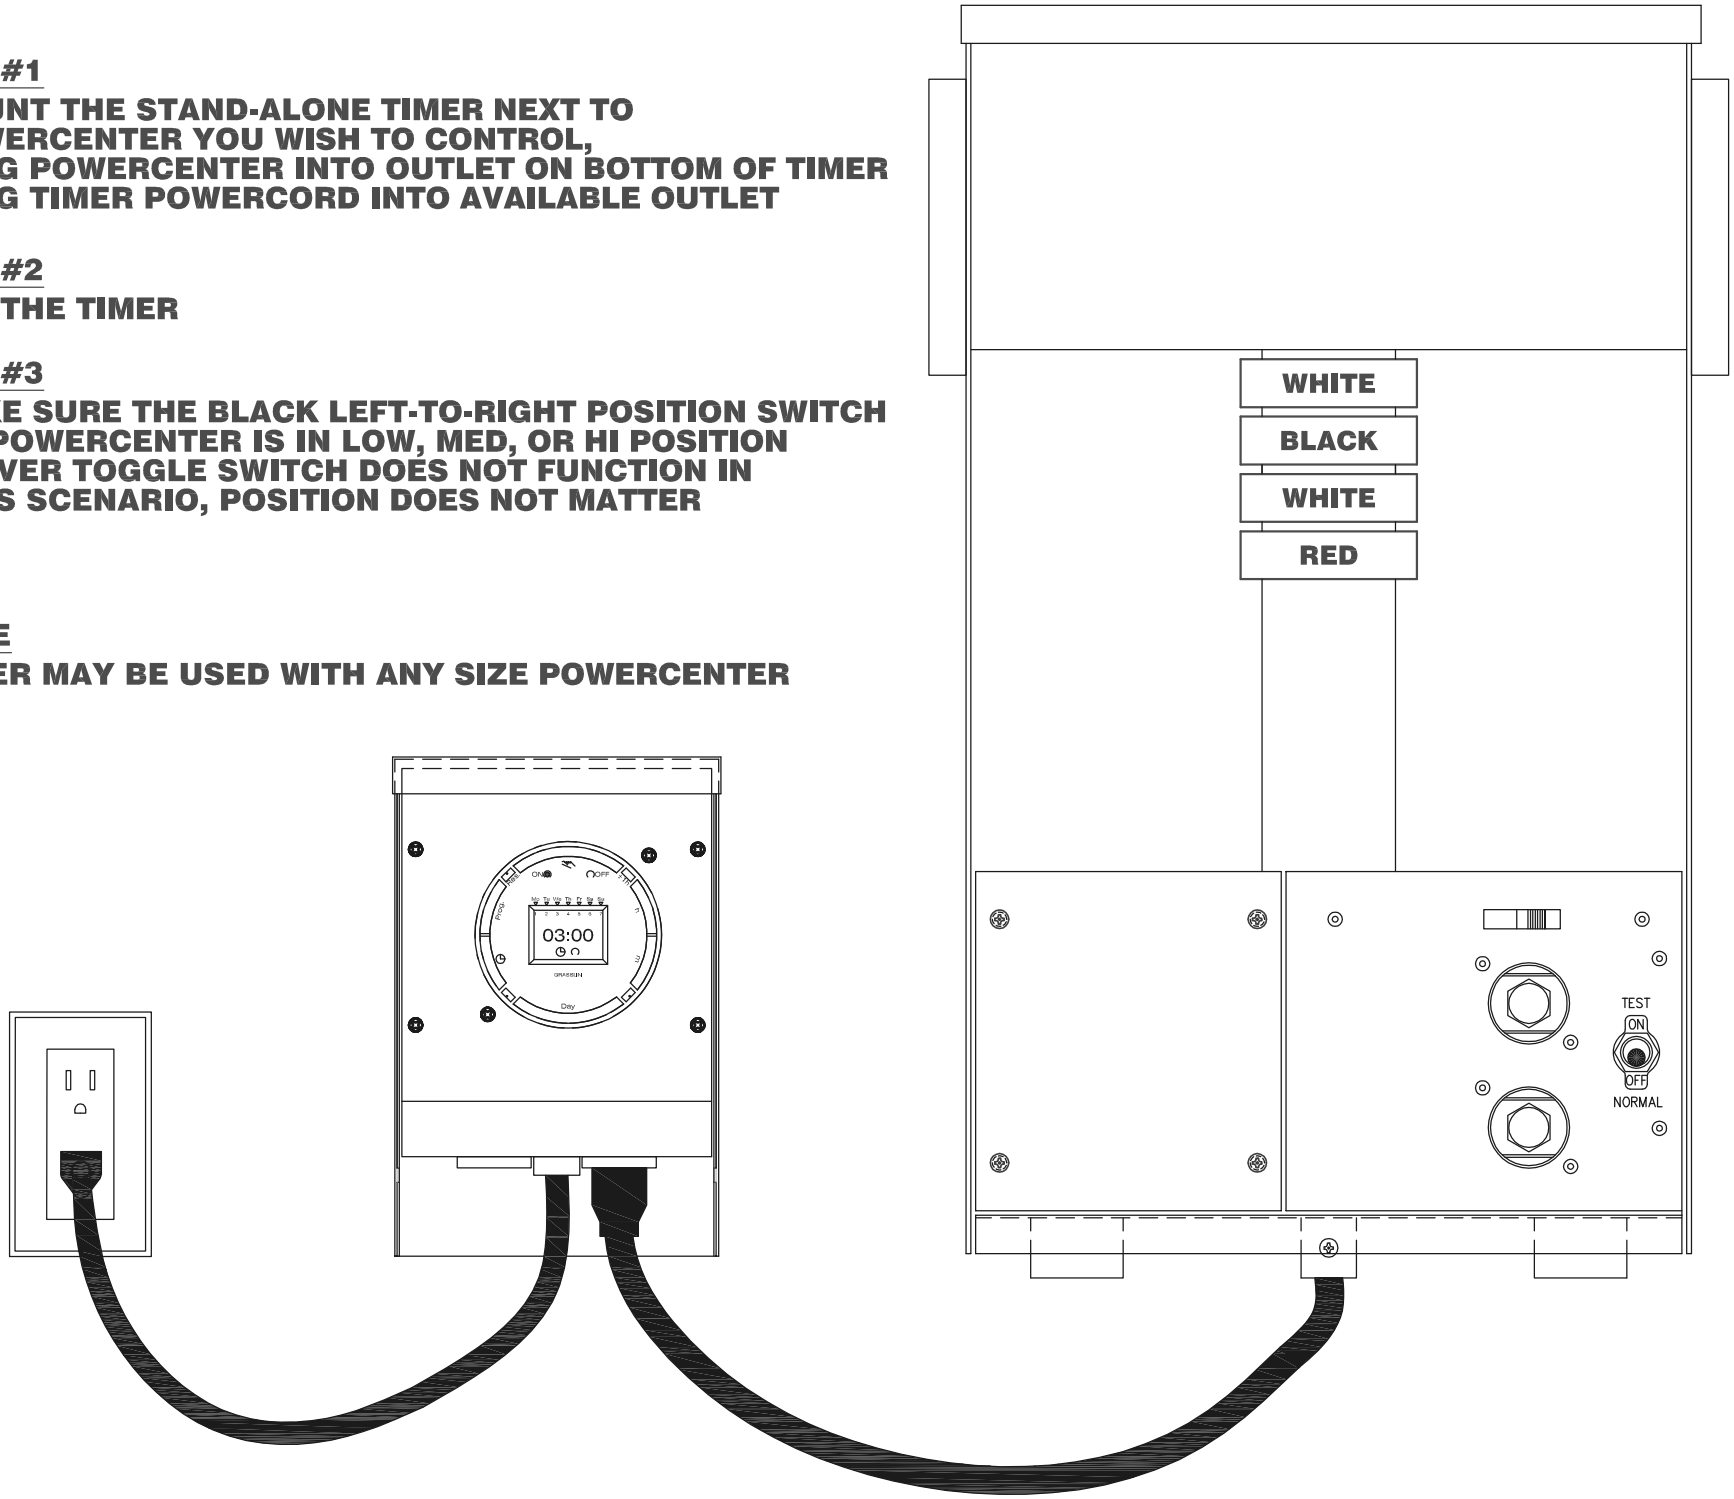
TIMER MAY BE USED WITH ANY SIZE POWERCENTER